


## ACT20X ACT20X-2HDI-2SDO-RNO-S

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

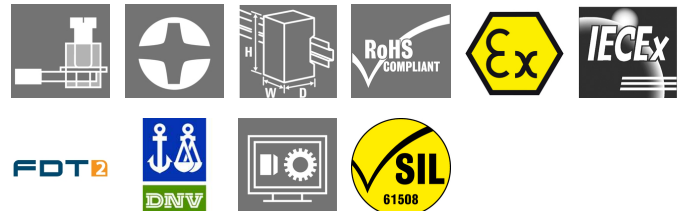

The ACT20X-HDI-SDO/ 2HDI-2SNO RNO/RNC isolating switch amplifiers are specially designed for recording NAMUR sensor signals and digital switching signals which originate from Ex zone 0.

Switching relays, optionally available with NO or NC contacts, transfer output signals to the safe zone. Integrated alarm contacts issue an alert in the event of a malfunction; this makes troubleshooting easier and increases system availability.

The rail mounted disconnect-switch amplifiers are optionally available in one- or two-channel versions. With 11 mm width per channel, the devices need little space in the electrical cabinet.

### General ordering data

Type	ACT20X-2HDI-2SDO-RNO-S
Order No.	<a href="#">8965370000</a>
Version	EX signal isolating converter, Ex-input: NAMUR sensor/switch, Safe-output: relay, NO contact, 2-channel
GTIN (EAN)	4032248784882
Qty.	1 pc(s).

**ACT20X**  
**ACT20X-2HDI-2SDO-RNO-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Width	22.5 mm	Width (inches)	0.886 inch
Height	117.2 mm	Height (inches)	4.614 inch
Depth	113.6 mm	Depth (inches)	4.472 inch
Net weight	190 g		

**Temperatures**

Humidity	0...95 % (no condensation)	Operating temperature, max.	60 °C
Operating temperature, min.	-20 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-20 °C	Operating temperature	-20 °C...60 °C
Storage temperature	-20 °C...85 °C		

**Probability of failure**

MTBF	207 Years
------	-----------

**Input EX**

Input frequency	< 20 Hz	Input resistance	1 kΩ
Output signal in case of wire break	< 0.1 mA, > 6.5 mA (in case of wire break)	Pulse duration	> 0.1 ms
Resistance	RP = 750 Ω / RS = 15kΩ	Sensor	NAMUR sensor, according to EN60947, switch with or without RS, RP
Sensor supply	8 V DC / 8 mA	Trigger level high	> 2.1 mA
Trigger level low	< 1.2 mA	Type	intrinsically safe circuit

**Alarm output**

Alarm function	Line interruption at the input, Short circuit at input, No supply voltage, Device error	Type	Relay, 1 NC (voltage-free)
Nominal switching voltage	≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2)	Continuous current	≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2)
Power rating	≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2)		

**General specifications**

Configuration	With FDT/DTM software	Supply voltage	19.2 – 31.2 V DC
Type of connection	Screw connection, Removable terminal block	NAMUR supply	8 V DC / 8 mA
Power consumption	≤ 1.9 W	Protection degree	IP20
Humidity	0...95 % (no condensation)		

**Insulation coordination**

EMC standards	DIN EN 61326, NE 21	Insulation voltage	2.6 kV (input / output)
Rated voltage	300 V		

**ACT20X**  
**ACT20X-2HDI-2SDO-RNO-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Digital output**

Switching capacity	500 VA / 60 W (safe area), 16 VA / 60 W (zone 2)	Type	Relay, 1 NO, Switching frequency 20 Hz
Nominal switching voltage	≤ 250 V AC / 30 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2)	Continuous current	≤ 2 A AC/DC (safe area, Zone 2 area)
Function	Output = input, direct or inverse (configurable)		

**Data for Ex applications (ATEX)**

Voltage $U_0$	10.6 V DC	Current $I_0$	12 mA DC
Power $P_0$	32 mW	Marking	II (1) G [Ex ia Ga] IIC/IIB/ IIA, II (1) D [Ex ia Da] IIIC, I (M1) [Ex ia Ma] I

**Safety-related basic specifications**

Device type	B	Hardware fault tolerance (HFT)	0
$T_{proof}$	4 Years	Safety category	SIL 2
Probability of outage PFH	$4.66 \times 10^{-8} h^{-1}$		

**Safety-related specifications Low demand mode**

Average Probability of Failure on Demand ( $PF_{D_{avg}}$ )	$2.04 \times 10^{-4}$ ( $T_{proof} = 1$ year), $4.08 \times 10^{-4}$ ( $T_{proof} = 2$ years), $1.02 \times 10^{-4}$ ( $T_{proof} = 5$ years)
---	---

**Connection data**

Type of connection	Screw connection, Removable terminal block	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

**Rated data UL**

UL certificate	E337701.pdf
----------------	-------------

**Ratings IECEx/ATEX/cUL**

ATEX certificate	09ATEX0168X.pdf	IEC Ex certificate	IECEx certification
Certificate No. (ATEX)	KEMA09ATEX0168X	Certificate No. (IECEx)	IECExKEM09.0072X

## ACT20X ACT20X-2HDI-2SDO-RNO-S

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

# Technical data

### Classifications

ETIM 3.0	EC002479	ETIM 4.0	EC002479
ETIM 5.0	EC002479	ETIM 6.0	EC002653
UNSPSC	30-21-18-01	eClass 5.1	27-21-01-07
eClass 6.2	27-21-01-07	eClass 7.1	27-21-01-07
eClass 8.1	27-21-01-07	eClass 9.0	27-21-01-07
eClass 9.1	27-21-01-20		

### Product information

Product information	Weidmüller provides an extended guarantee period of 36 months for this device.
Descriptive text ordering data	CBX200 USB configuration adapter - 8978580000

### Approvals

Approvals



Approvals	DNVGL;
ROHS	Conform

### Downloads



Approval/Certificate/Document of Conformity	<a href="#">SIL certificate</a> <a href="#">Certification DNV GL</a> <a href="#">Declaration of Conformity</a>
Brochure/Catalogue	<a href="#">CAT 4.1 ELECTR 16/17 EN</a>
Engineering Data	<a href="#">EPLAN, WSCAD</a>
Engineering Data	<a href="#">STEP</a>
Software	<a href="#">WI-Manager, DTM-Library for online installation</a>
User Documentation	<a href="#">Instruction sheet</a> <a href="#">Manual</a> <a href="#">MAN SAFETY ACT20X-(2)HDH(2)SDO-RNx</a>

**Data sheet**

**ACT20X  
ACT20X-2HDI-2SDO-RNO-S**



**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

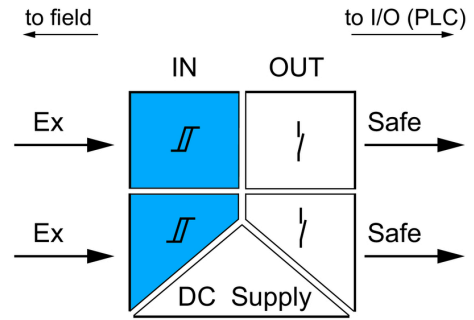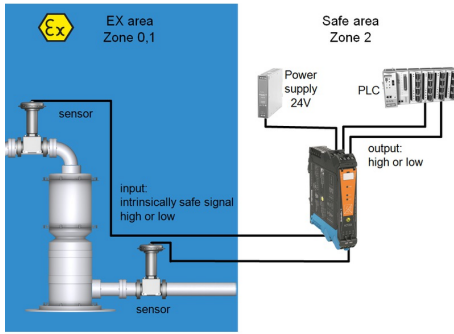


application schematic

**Dimensioned drawing**

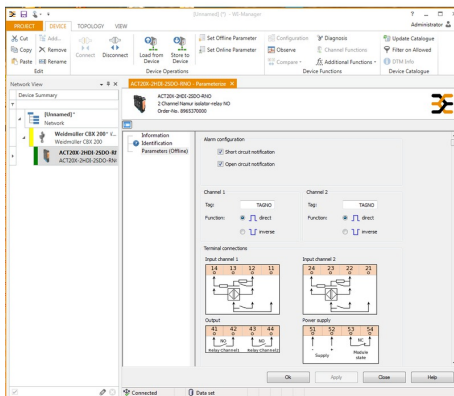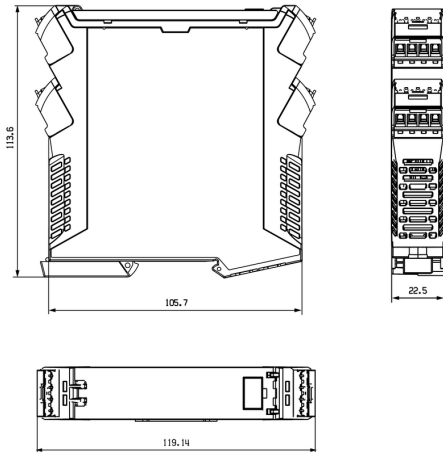

screenshot of configuration with FDT2 / DTM software

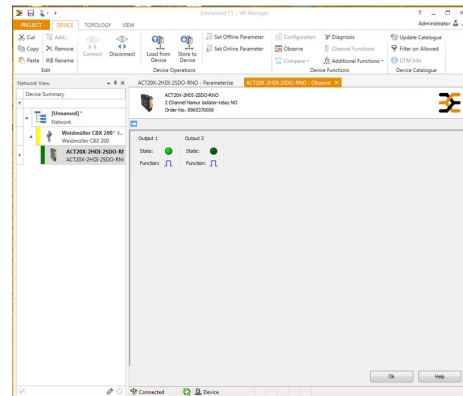


screenshot of "observe" with FDT2 / DTM software

**ACT20X**  
**ACT20X-2HDI-2SDO-RNO-S**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

Drawings

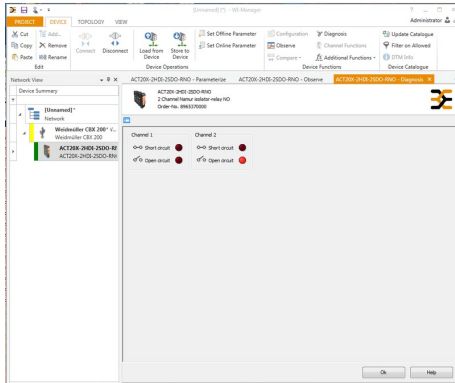

screenshot of "diagnosis" with FDT2 / DTM software

Connection diagram

