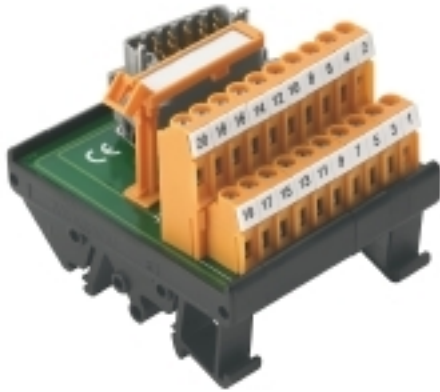


RS ELCO
RS ELCO 20/20RM S**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

ELCO contacts inserts are used in electrical power plants, refineries and a variety of process applications – wherever stable and reliable signal transmission is required. The ELCO connector features both a reliable connection system and a high signal capacity.

The line of RS ELCO interfaces and pre-assembled PAC ELCO cables is a specially designed solution for these requirements.

General ordering data

Type	RS ELCO 20/20RM S
Order No.	1126610000
Version	Interface, RS ELCO, ELCO plug-in connector, 20, LP2N 5.08mm
GTIN (EAN)	4032248908219
Qty.	1 pc(s).

RS ELCO
RS ELCO 20/20RM S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	60 mm	Length (inches)	2.362 inch
Width	70 mm	Width (inches)	2.756 inch
Height	60 mm	Height (inches)	2.362 inch
Net weight	142 g		

Temperatures

Operating temperature, max.	50 °C	Operating temperature, min.	-25 °C
Storage temperature, max.	60 °C	Storage temperature, min.	-40 °C
Operating temperature	-25...50 °C	Storage temperature	-40...60 °C

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection Data

Connection on control side	ELCO plug-in connector	Number of poles (control side)	20-pole plug
Contact material (control side)	Phosphor bronze alloy	Polarity hardware codification	1
Connector alignment	Right	Connection (field side)	LP2N 5.08mm
Number of poles (field side)	20 P		

Rating data

Rated voltage	150 V AC / 200 V DC	Rated current per connection	1.5 A
Total operating current	30 A		

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	< 150 V AC
Surge voltage category	II	Pollution severity level	2
Pulse voltage test (1,2/50µs)	2.5 kV	Insulation test voltage	0.8 kVAC

Connection field

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	0.5 mm ²	Sleeve with plastic collar, max.	2.5 mm ²
Min. wire cross-section, AWG	AWG 26	Max. wire cross-section, AWG	AWG 12
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Classifications

ETIM 4.0	EC001421	ETIM 5.0	EC001421
ETIM 6.0	EC002780	eClass 6.2	27-24-22-04
eClass 7.1	27-14-11-52	eClass 8.1	27-14-11-52
eClass 9.0	27-14-11-52	eClass 9.1	27-14-11-52

**RS ELCO
RS ELCO 20/20RM S****Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com**Technical data****Product information**

Descriptive text technical data	Polarizer in position 1
Instructions for accessories	Refer to the "Universal cables PAC-ELCO" section in chapter F

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	K338_01_11.pdf
Brochure/Catalogue	CAT 4.5 ELECTR 16/17 EN
User Documentation	Table of connections

Data sheet

RS ELCO
RS ELCO 20/20RM S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

